


1 2 3 4 5 6

No.	Revision	Date	Name
△	PN Change from 1A-163-00	31/JUL/2013	S.J.PARK
△			

SPECIFICATIONS;
 IMPEDANCE: 50 Ohms
 Frequency Range: DC~6.0 GHz
 Working Voltage: 250 VRMS
 Insulation Resistance: 5000M ohms min
 Temperature Range: -55~155°C
 VSWR: DC~6GHz : ≤1.20

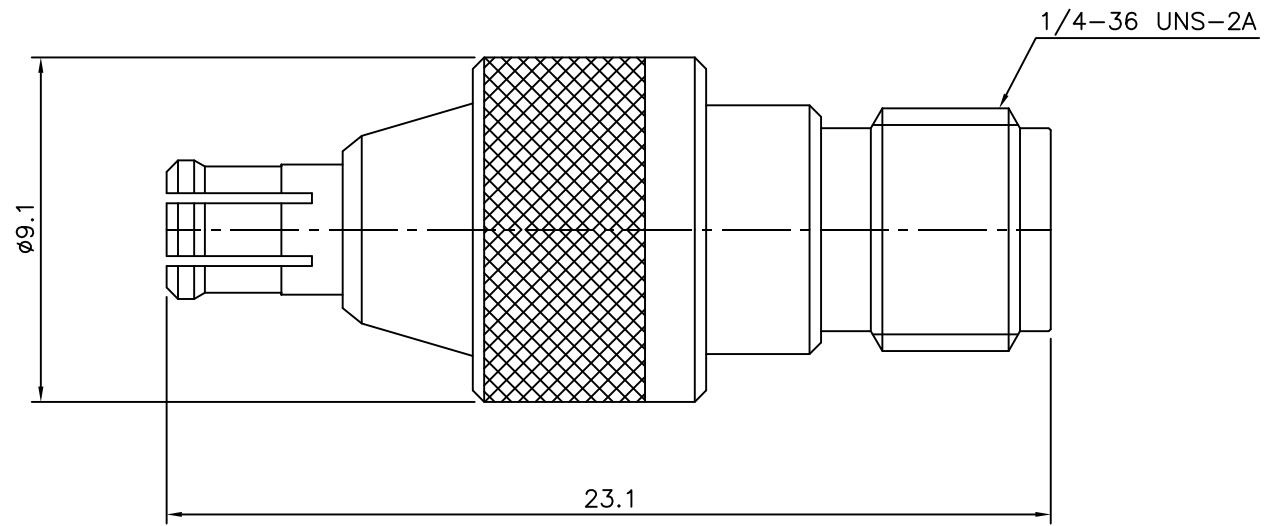

Item	Materials	Plating
Body	Brass	Gold Plated
Center contact	Be-Cu	Gold Plated
Insulator	PTFE	-

SMA JACK to MCX PLUG
ADAPTOR

PARTS No. AD-1214-201		NAME SMA(J)-MCX(P) Adap.		APPROVED
MATERIAL	FINISH	TOLERANCES OTHERWISE SPEC. ±0.05 ANGLES ±1°		CHECKED
		SCALE	UNIT mm	DESIGNED S.J.LEE
		DWG NO. AD-1214-201	DATE. 2001.04.15	

CUSTOMER

