


SPECIFICATIONS

Impedance	50Ω
Frefuency range	DC ~ 11GHz
Contact current	DC 3.5A max
Voltage rating	1000V rms
Insulation resistance	5000MΩ min.
Insertion loss	≤0.35dB
V.S.W.R	≤1.2@9GHz, ≤1.3@11GHz
Temperature range	-55°c ~ +155°c

No.	Revision	Date	Name
1	PN Change from 1A-132-00	05/07/2013	B.G.YUN
2			

RoHS Compliant

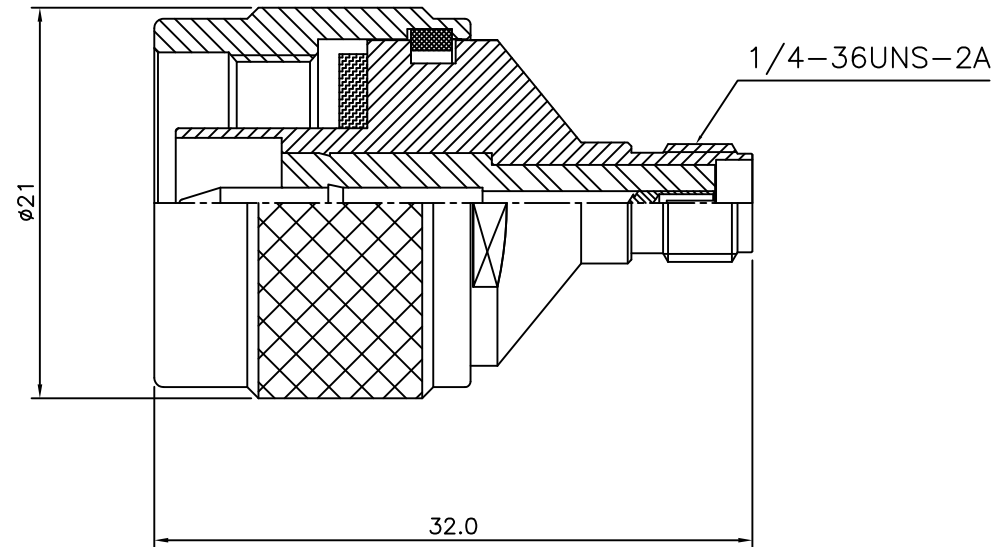

N PLUG-SMA JACK ADAPTOR

Item	Materials	Plating
Body	Brass	Nickel Plated
Center contact	Be-Cu	Gold Plated
Insulator	PTFE	-

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No. AD-1423-301		NAME NP-SMAJ ADAP.			APPROVED
MATERIAL		FINISH		TOLERANCES OTHERWISE SPEC. ± 0.05 ANGLES $\pm 1^\circ$	CHECKED
		SCALE	UNIT mm		DESIGNED S.J.LEE
 DONGJIN TI.		DWG NO. AD-1423-301			DATE. 18/SEP/2007