


No.	Revision	Date	Name
△	PN Change from 1A-353-00	27/11/2013	B.G.YUN
△			

5/8-24UNEF-2A

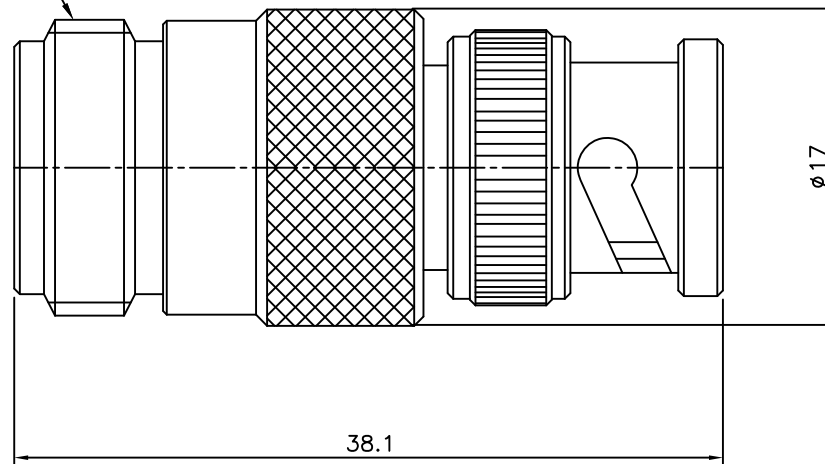

**SPECIFICATIONS**

Impedance : 50 ohm  
 Frequency Range : DC~4GHz  
 V.S.W.R : 1.20:1 Max  
 Insertion Loss : 0.2dm Max  
 Power Handling : 2 Watt  
 RF Leakage : < - 55dB  
 Insulation Resistance : 5000MΩ min  
 Contact Resistance : < 2mΩ  
 Working Voltage : 500V RMS max  
 Operating Temperature range; -65°C~125°C

N JACK to BNC PLUG-Adaptor  
(50 OHm)

Item	Materials	Plating
Coupling cap	Zinc	Nickel Plated
Body	Brass	Nickel Plated
Center contact	Be-Cu	Gold Plated
Insulator	PTFE	-

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	AD-2123-201		NAME N/J-BNC/P-Adaptor		APPROVED
MATERIAL	FINISH	TOLERANCES OTHERWISE SPEC. ±0.05		ANGLES ±1°	CHECKED
SCALE		UNIT mm	DESIGNED S.J.LEE		
DWG NO.		AD-2123-201		DATE. 2001.5/04	

**CUSTOMER**

