


1 2 3 4 5 6

No.	Revision	Date	Name
△			
△			

SPECIFICATIONS

Impedance ; 50 OHm
 Frequency ; DC~4GHz
 Insulation resistance ; 5,000 MEGOHM
 Voltage ; 500 VOLTS PEAK
 Dielectric withstand voltage; 1,500 VRMS
 V.S.W.R ; 1.35 TO 4000 MHZ
 Temperature range : -55°C to +155°C

RoHS Compliant

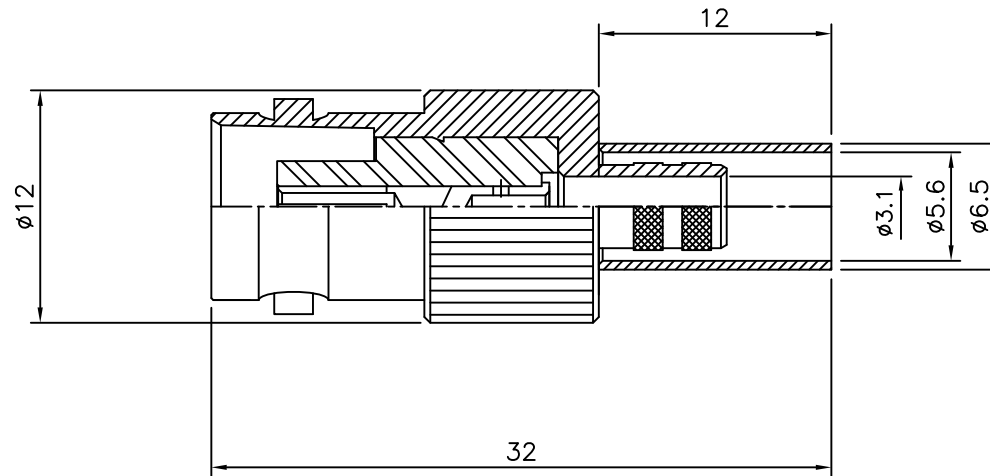

BNC-Straight JACK
for Cable-RG400

Item	Materials	Plating
Body	Brass	Nickel Plated
Center contact	Be-Cu	Gold Plated
Ferrule	Brass	Nickel Plated
Insulator	PTFE	-

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	BNC-212-003	NAME	BNC-SJ-400		APPROVED
MATERIAL	FINISH	TOLERANCES OTHERWISE SPEC. ±0.05		ANGLES ±1°	CHECKED
SCALE		UNIT	mm		DESIGNED
DWG NO.		BNC-212-003		DATE.	30/DEC/2013

CUSTOMER

