


4	5	6	
No.	Revision	Date	Name
△	PN Change from 1B-801-00	20/JAN/2014	S.J.PARK
△			

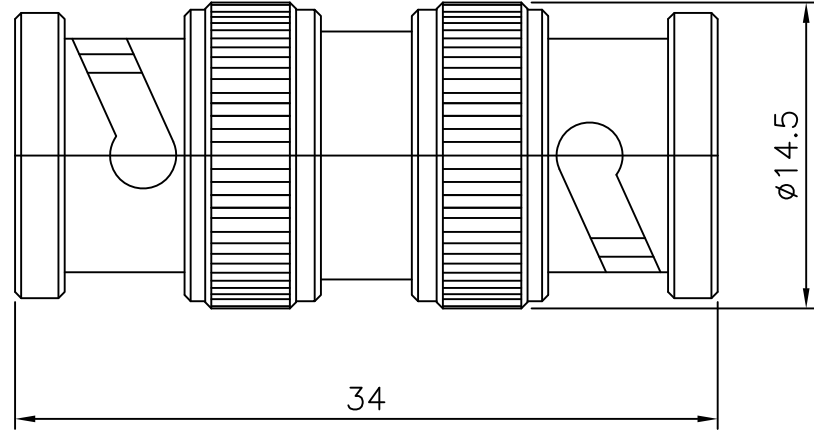

Electrical data

1. Impedance : 50Ω
2. Frequency range : DC~4GHz
3. Contact current : DC 3.5A max
4. Voltage rating : 500Vrms
5. Contact resistance : Center contacts : 2.0mΩ
Outer contact : 1.0mΩ
6. Insulation resistance : 5000MΩ min
7. Insertion loss : 0.3dB at 3GHz
8. V.S.W.R : ≤1.15

Item	Materials	Plating
Body	Brass	Nickel Plated
Center contact	Brass	Gold Plated
Insulator	PTFE	-

BNC to BNC PLUG-Adaptor

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	BNC-801-001	NAME	BNC/P-BNC/P-Adaptor		APPROVED
MATERIAL	FINISH	TOLERANCES	OTHERWISE SPEC. ±0.05 ANGLES ±1°		CHECKED
		SCALE	UNIT		DESIGNED
			mm		S.J.LEE
		DWG NO.	BNC-801-001		DATE.
					2001.5/04

CUSTOMER



DONGJIN TI.