


| No. | Revision | Date | Name |
|-----|----------|------|------|
| △ | | | |
| △ | | | |

RoHS Compliant

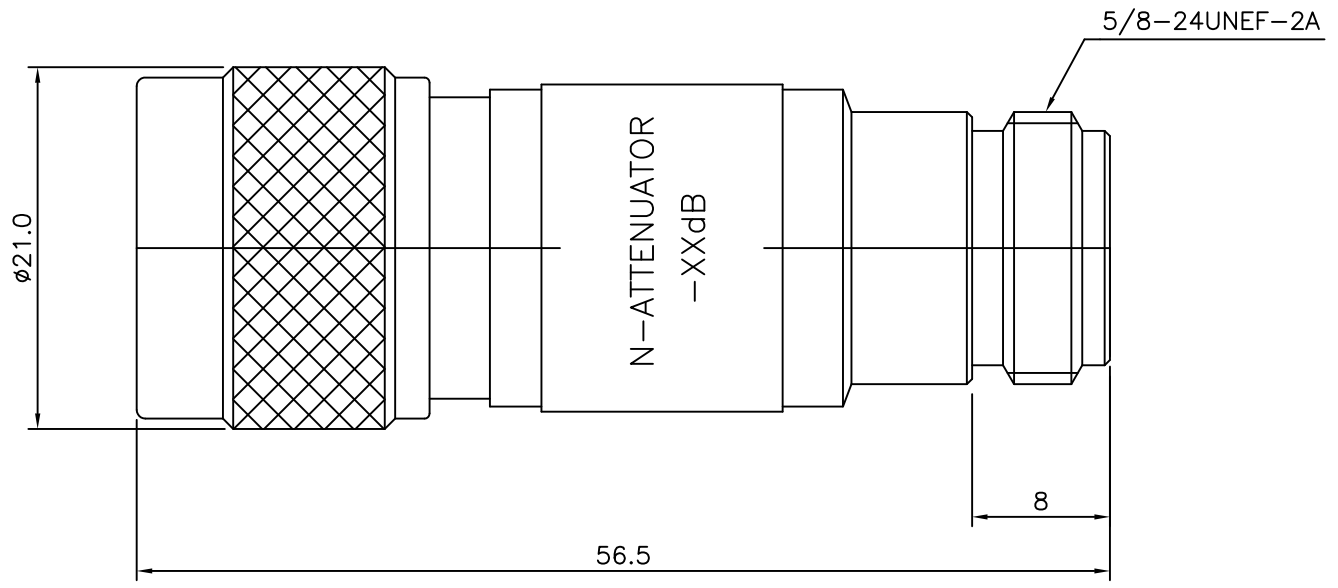

SPECIFICATIONS

Frequency Range----- DC~ 3.0GHz
 Attenuation Values----1-10,12,15 & 20dB
 Attenuation Accuracy----- ± 0.3 dB
 Attenuation Values----30dB
 Attenuation Accuracy----- ± 0.5 dB
 VSWR-----1.20:1Max.
 Impedance----- 50 Ohms
 Power Rating----- 1.0 Watts
 Oper Temp Range----- $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$

CONNECTOR----- Brass/Nickel plated
 Conductors----- Be-Cu/Gold plated

N-ATTENUATORS
XXdB

| NO. | DESCRIPTION | Q'TY | MATERIAL | FINISH | REMARKS. |
|--------------------------------|----------------------|--|----------|------------------------|---------------------|
| PARTS No. DJAT-03-XX-01N-0A | NAME N-ATTENUATOR | | APPROVED | | |
| MATERIAL | FINISH | TOLERANCES OTHERWISE SPEC. ± 0.05 | | ANGLES $\pm 1^{\circ}$ | CHECKED |
| SCALE | | UNIT mm | | | DESIGNED S.J.LEE |
| DONGJIN TI. | | DWG NO. DJAT-03-XX-01N-0A | | DATE. 19/AUG/2007 | |

CUSTOMER