


4	No.	Revision	Date	Name
	△	PN Change from SA03B-XX	31/JUL/2013	S.J.PARK
	△			

RoHS Compliance

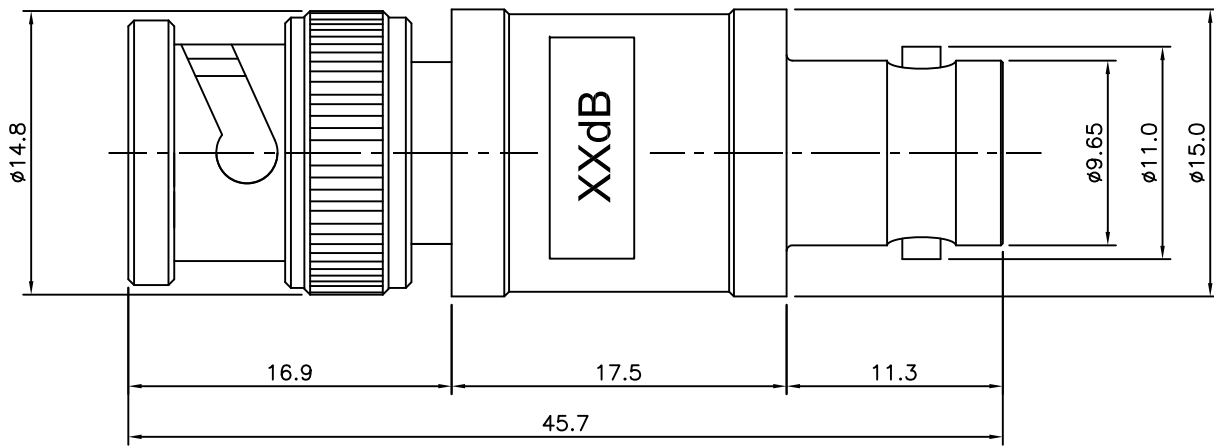

SPECIFICATIONS

FREQUENCY RANGE: DC TO 3 GHz  
 ATTENUATION(LOSS): 1~30 dB  
 ACCURACY: ±.5 dB  
 VSWR: 1.2:1 @2GHz 1.3:1 @3GHz  
 INPUT POWER: 2 WATT AVERAGE

BNC-ATTENUATORS(PLUG-JACK)  
 2WATT,1~30dB

Item	Materials	Plating
Coupling cap	Zinc	Nickel Plated
Body	Brass	Nickel Plated
Center contact	Brass	Gold Plated
Insulator	Be-Cu	
	PTFE	-

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No. DJAT-03-XX-02B-0A		NAME BNC-ATTEN 2W-XXdB			APPROVED S.J.LEE
MATERIAL		FINISH		TOLERANCES OTHERWISE SPEC. ±0.05 ANGLES ±1°	CHECKED
		SCALE	UNIT mm		DESIGNED M.G.KIM
<b>CUSTOMER</b>		DONGJIN TI.			DWG NO. DJAT-03-XX-02B-0A
					DATE. 27/OCT/2010