


No.	Revision	Date	Name
△	PN Change form SA03B75-XX	29/01/2014	B.G.YUN
△			

SPECIFICATIONS

FREQUENCY RANGE: DC TO 3 GHz
 ATTENUATION(LOSS): 1~10 dB
 ACCURACY: ±.5 dB
 VSWR: 1.2:1@2GHz 1.3:1@3GHz
 INPUT POWER: 2 WATT AVERAGE

RoHS Compliance

P/N(DJAT-03-XX-02B-0C)	dB
DJAT-03-01-02B-0C	1
DJAT-03-02-02B-0C	2
DJAT-03-03-02B-0C	3
DJAT-03-04-02B-0C	4
DJAT-03-05-02B-0C	5
DJAT-03-06-02B-0C	6
DJAT-03-07-02B-0C	7
DJAT-03-08-02B-0C	8
DJAT-03-09-02B-0C	9
DJAT-03-10-02B-0C	10

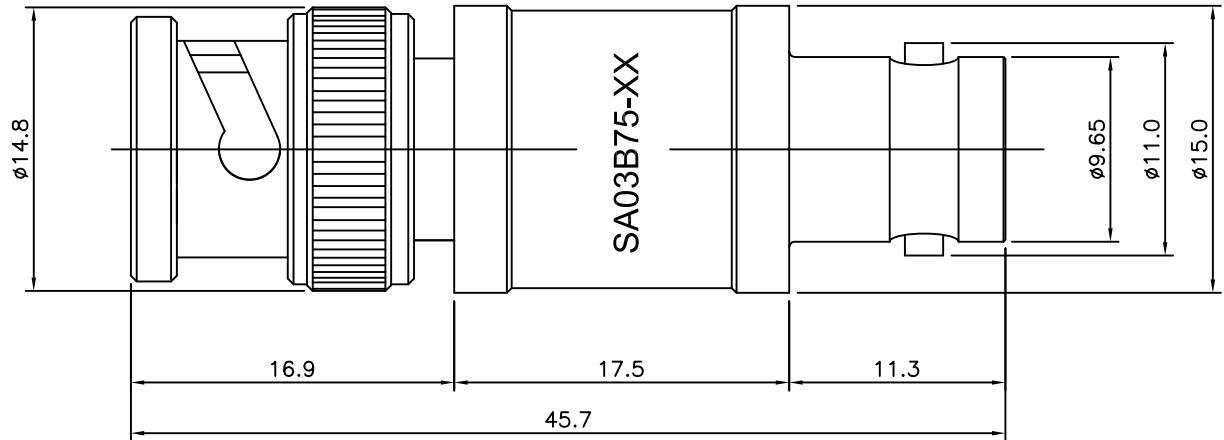

BNC-ATTENUATORS(PLUG-JACK)
 75Ω
 (1 ~ 10dB)

Item	Materials	Plating
Body	Brass	Nickel Plated
Coupling cap	Zinc	Nickel Plated
Center contact	Brass	Gold Plated
	Be-Cu	Gold Plated
Insulator	PTFE	-

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No. DJAT-03-XX-02B-0C		NAME BNC-ATTEN 75Ω		APPROVED S.J.LEE	
MATERIAL		FINISH		TOLERANCES OTHERWISE SPEC. ±0.05 ANGLES ±1°	
SCALE		UNIT mm		DESIGNED B.G.YUN	
DWG NO. DJAT-03-XX-02B-0C		DATE. 29/JAN/2014			

CUSTOMER

