


4	5	6
No.	Revision	Date
△	PN Change from D-ATT-S2XX	21/AUG/2013
△		
		Name
		S.J.PARK

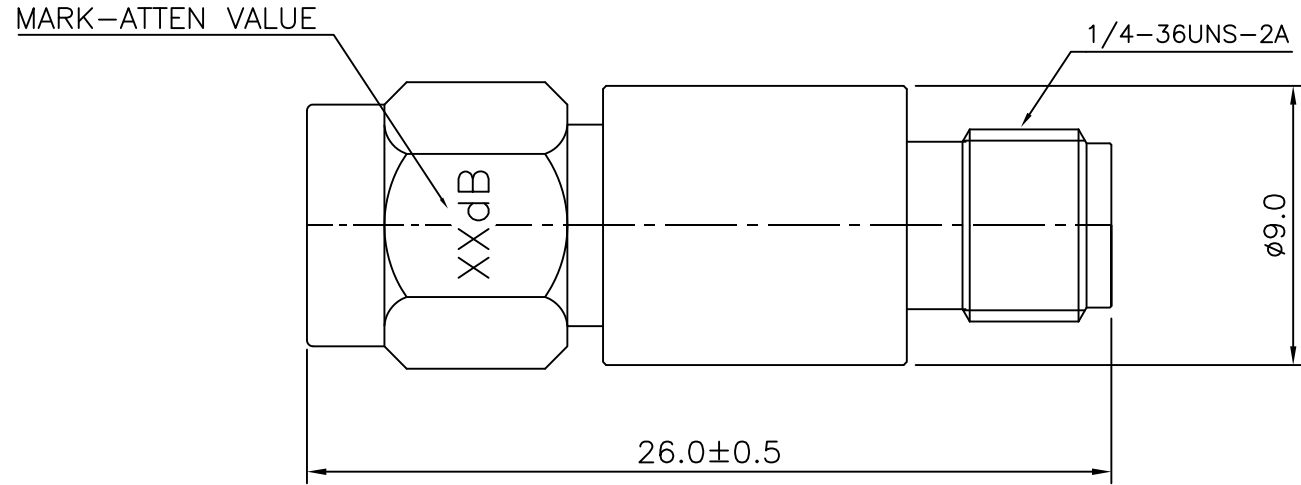

SPECIFICATIONS

Frequency Range----- DC~ 3.0GHz
 Attenuation Values----1-10,12,15 & 20dB
 Attenuation Accuracy----- ±0.3dB
 VSWR-----1.20:1Max.
 Impedance----- 50 Ohms
 Power Rating----- 2.0 Watts
 Oper Temp Range----- -40°C~+85°C
 CONNECTOR----- Brass/SuCo plated
 Conductors----- Be-Cu/Gold plated

SMA-M/F ATTENUATORS
 DC~3GHz. 2WATT

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	DJAT-03-XX-02S-0A	NAME	SMA-ATTENUATORS		APPROVED
MATERIAL	FINISH	TOLERANCES	OTHERWISE SPEC. ±0.05 ANGLES ±1°		CHECKED
		SCALE	UNIT		DESIGNED
			mm		S.J.LEE
		DWG NO.	DJAT-03-XX-02S-0A		DATE.
					23/APR/2007

CUSTOMER



DONGJIN TI.