


	1	2						3	4	5		6
	~30	~50	~120	~200	~300	~500	~1,000	~2,000	2,000~			
MACHINING	±0.05	±0.1	±0.2									
ASSEMBLY	±0.2	±0.3	±0.4									
ANGLE	±1°	±0°30'	±0°20'									
CABLE(Bending)	±1	±2	±3	±4	±5	±6						
CABLE(Flexible)	0~+5		0~+10			0~L*0.01						
CABLE(Signal)	+10			+20			+50					

No.	Revision	Date	Name
△			
△			

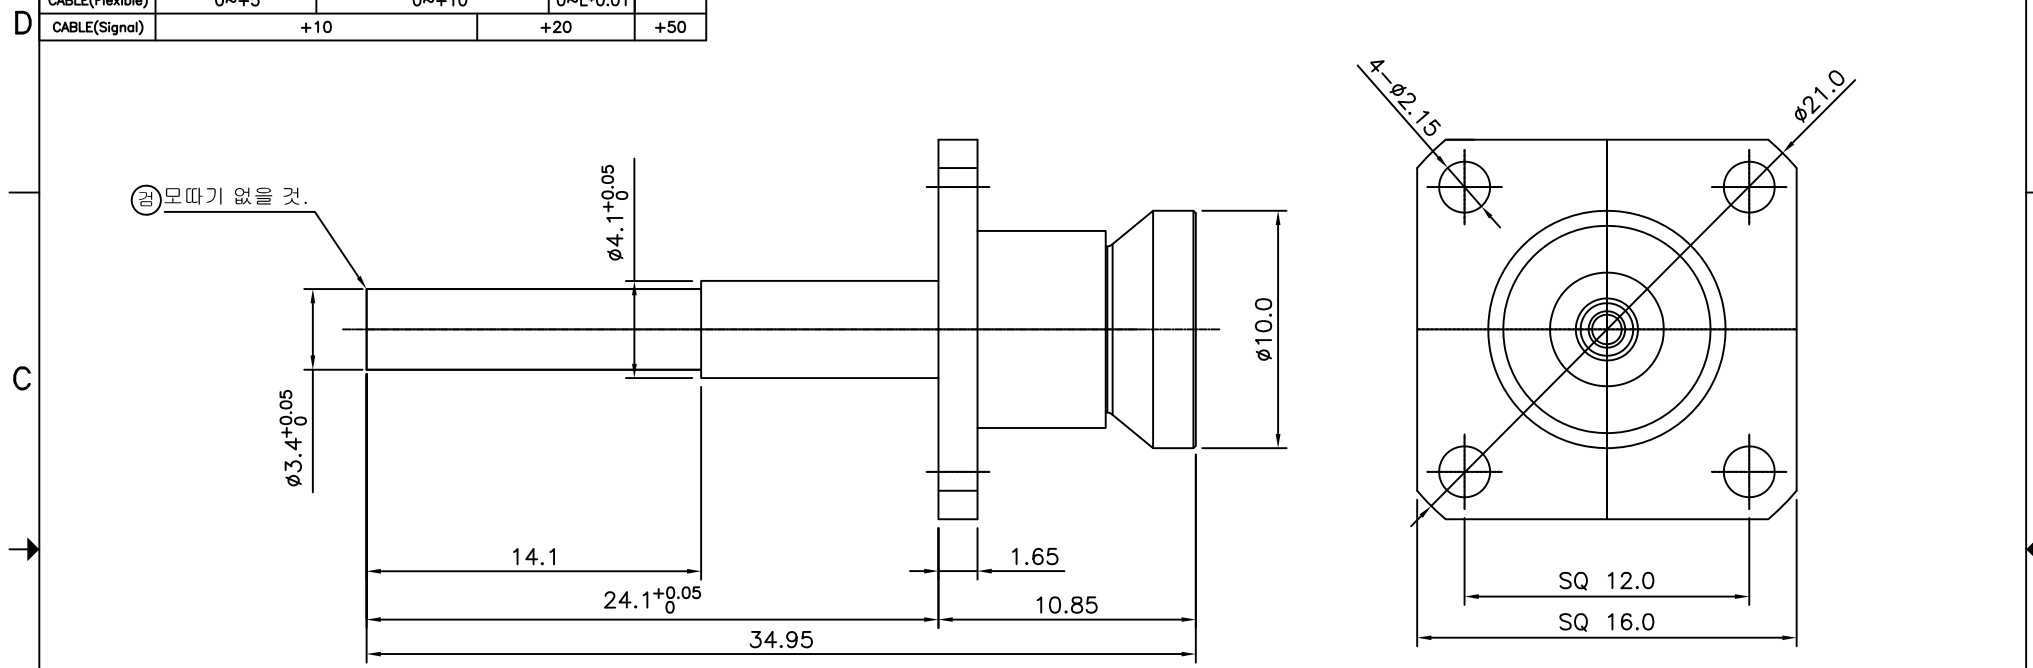

SPECIFICATIONS;
 IMPEDANCE: 50 Ohms
 Frequency Range: DC~4.5 GHz
 Working Voltage: 330 VRMS
 Insulation Resistance: 1000M ohms min
 Temperature Range: -40~125°C

06	INSULATOR	1EA	PTFE	-	
05	INSULATOR	1EA	LCP GF30%	-	
04	CENTER CONTACT B	1EA	BRASS	Gold Plate 0.1um	
03	CENTER CONTACT A	1EA	Be-Cu	Gold Plate 0.1um	
02	OUTER CONTACT	1EA	BRASS	SUCO Plate	
01	BODY	1EA	BRASS	SUCO Plate	
NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	CODE

PARTS No.		NAME		APPROVED	
		복사소자 커넥터		K.Y.SON	
MATERIAL		FINISH		CHECKED	
				M.K.KIM	
SCALE		UNIT		DESIGNED	
		mm		B.G.YUN	
DWG NO.		DATE.			
DJBK-504-003		24/JUL/2018			

CUSTOMER

