


	1	2								3	4	5	6
	~30	~50	~120	~200	~300	~500	~1,000	~2,000	2,000~				
MACHINING	±0.05	±0.1		±0.2									
ASSEMBLY	±0.2	±0.3		±0.4									
ANGLE	±1'	±0'30'		±0'20'									
CABLE(Bending)	±1	±2	±3	±4	±5	±6							
CABLE(Flexible)	0~+5		0~+10				0~L*0.01						
CABLE(Signal)	+10			+20			+50						

No.	Revision	Date	Name
△			
△			

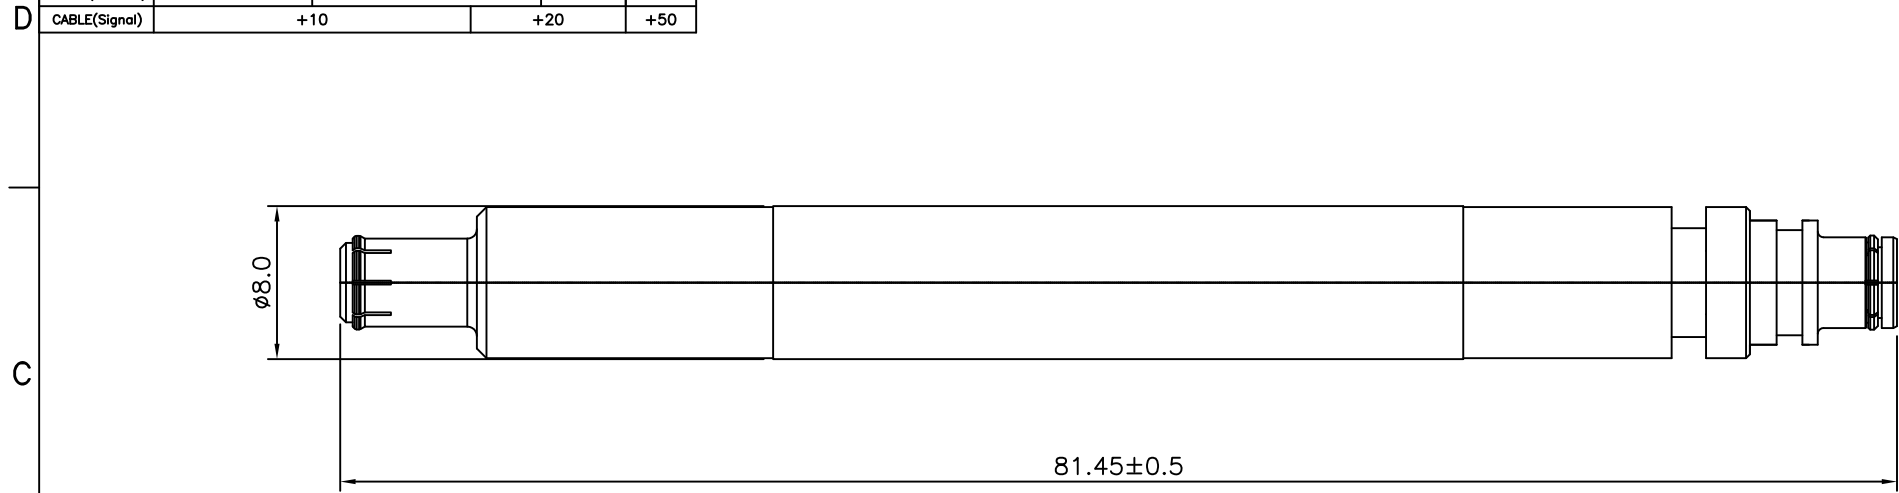

SPECIFICATION
 Pass Band : 2.8~3.5 GHz
 Impedance: 50Ω
 VSWR: 1.5:1
 Rejection : 30dBc @ 6GHz
 Misalignment
 Axial : ±1.0mm
 Radial : ±0.8°

10	INSULATOR D	1	PTFE	-	
09	INSULATOR C	2	PTFE	-	
08	INSULATOR B	1	PTFE	-	
07	INSULATOR A	1	PTFE	-	
06	OUTER CONTACT	1	BRASS	Gold Plate 0.1um	
05	CENTER BAR	1	BRASS	Silver Plate	
04	CENTER CONTACT	2	Be-Cu	Gold Plate 0.1um	
03	BODY C	1	BRASS	Nickel Plate	
02	BODY B	1	Be-Cu	Nickel Plate	
01	BODY A	1	Be-Cu	Nickel Plate	
NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	CODE
PARTS No.			NAME		APPROVED
			DJB M Low Pass Filter		K.Y.SON
CUSTOMER					CHECKED
			SCALE	UNIT	DESIGNED
				mm	M.K.KIM
			CODE No.	DJLPP-35GM_R	DATE.
					22/JUN/2017

CUSTOMER



DONGJIN TI.