


	1	2						3	4	5		6
		~30	~50	~120	~200	~300	~500	~1,000	1,001~			
MACHINING		±0.05	±0.1		±0.2							
ASSEMBLY		±0.2	±0.3		±0.4							
ANGLE		±1°	±0°30'		±0°20'							
CABLE(Bending)		±1	±2	±3	±4	±5	±6					
CABLE(Flexible)		0~+5			0~+10			0~L*0.01				

No.	Revision	Date	Name
△			
△			

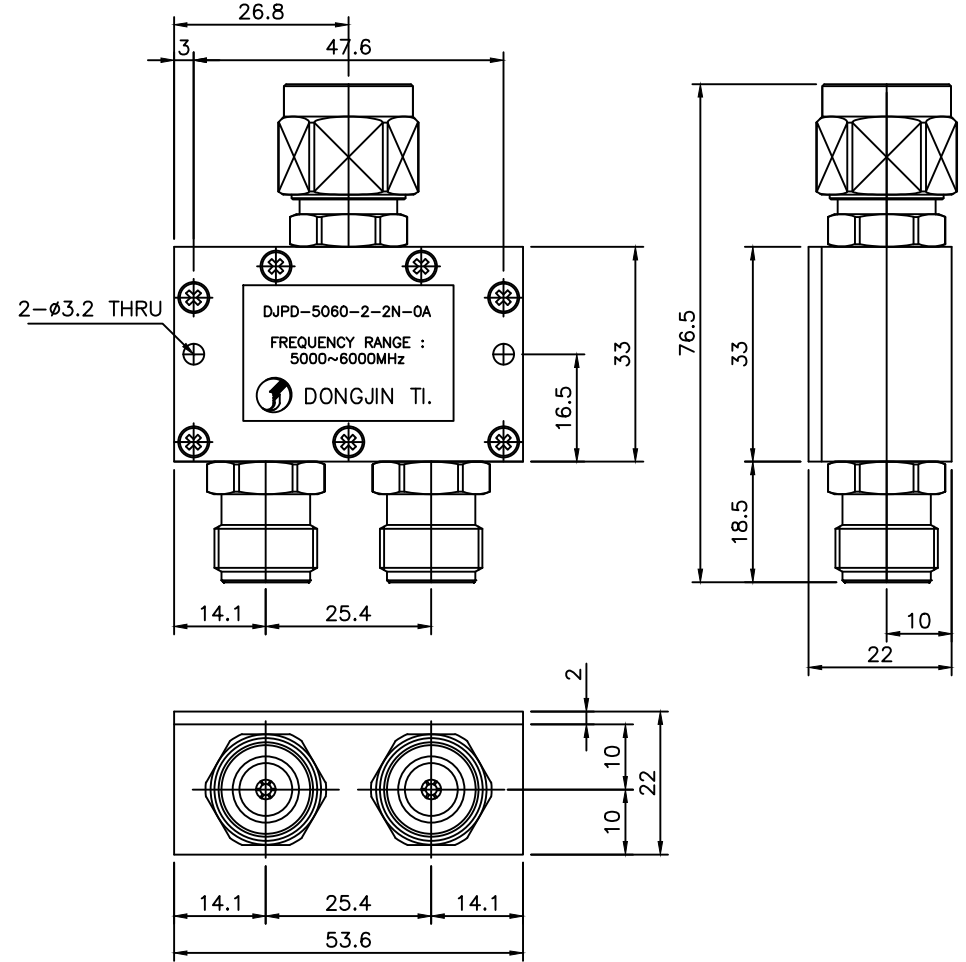

SPECIFICATIONS

Frequency Range : 5000~6000MHz
 Impedance : 50 ohms
 VSWR : 1.2 Max
 Insertion loss : 0.6 Max
 Isolation : 20dB
 Phase Balance : ± 1°
 Power Handling : 1.0W
 IP67 GRADE
 Coating Paint : DIC-547 TEXTURE (Housing)
 (Hex Panel of the Connectors)

Item	Materials	Plating
Housing	AL6061-T6	W.Chromate
Connector Body	Brass	Nickel Plated
Connector Pin	Be-Cu	Gold Plated
Insulator	PTFE	-

CUSTOMER

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	DJPD-5060-2-2N-0A	NAME	2WAY-DIVIDER		APPROVED C.S.PARK
MATERIAL	FINISH	TOLERANCES			CHECKED
		SCALE	UNIT mm		DESIGNED D.H.JANG
		DWG NO. DJPD-5060-2-2N-0A			DATE. 04/FEB/2020

