
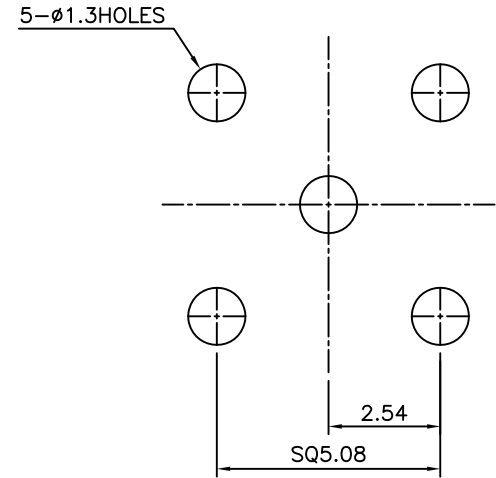
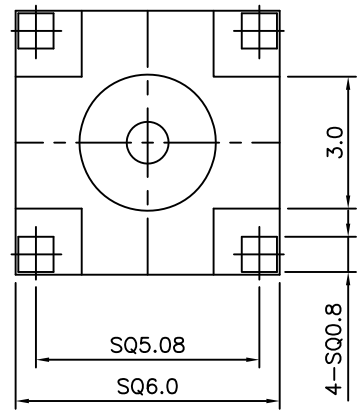


1 2 3 4 5 6

No.	Revision	Date	Name
▲	PN Change from 1M-702-S3537	12/FEB/2014	S.J.PARK
▲			

Electrical Data
 Impedance : 50ohm
 Frequency range : DC~6 GHz
 V.S.W.R : 1.5 Max
 DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VRMS
 TEMPERATURE RANGE: -40°C ~ +155°C

RoHS Compliant

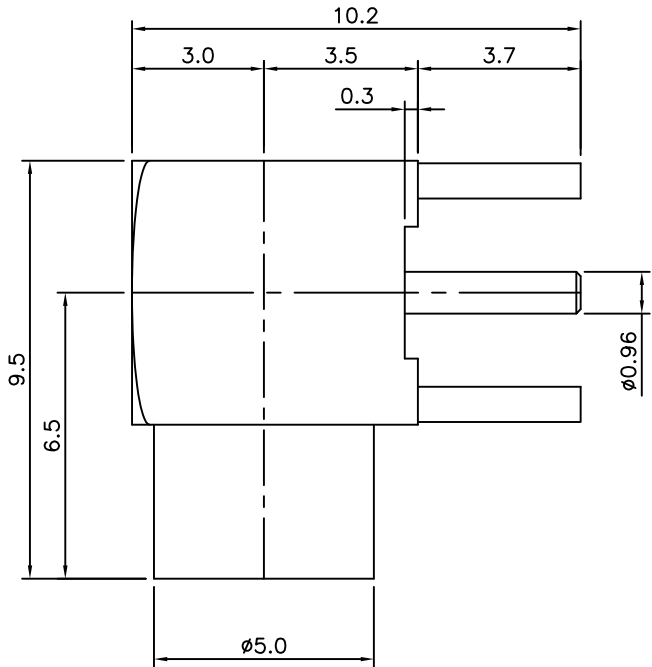

PCB MOUNT HOLES

MCX-Raigt Angle
 JACK PCB Mount

Item	Materials	Plating
Body	Brass	Gold Plated
Center contact	Be-Cu	Gold Plated
	Brass	Gold Plated
Insulator	PTFE	-

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	MCX-608-002		NAME	MCX-LJ PCB	APPROVED
MATERIAL	FINISH	TOLERANCES OTHERWISE SPEC. ±0.05		ANGLES ±1°	CHECKED
		SCALE	UNIT mm		DESIGNED S.J.LEE
		DWG NO. MCX-608-002		DATE. 2004.04.05	

CUSTOMER

