


| | | | | |
|---|-----|--------------------------|------------|---------|
| 4 | No. | Revision | Date | Name |
| | △ | PN Change from 1S-211-00 | 19/12/2013 | B.G.YUN |
| | △ | | | |

SPECIFICATIONS

Impedance ; 50ohm
 Frequency ; DC~12.4GHz
 Temperature range : -55°C to +155°C
 2002/95/EC (RoHS) : Compliant

RoHS Compliant

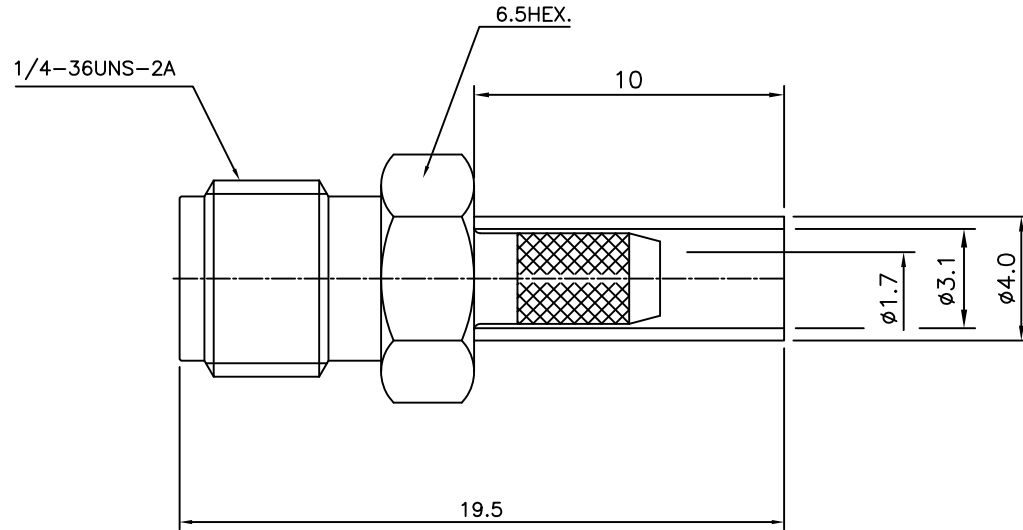

SMA-Straight-JACK
 for Cable:RG-316,174

| Connector parts | Materials | Finish |
|-----------------|-----------|-------------|
| Body | Brass | Gold Plated |
| Center contact | BeCu | Gold Plated |
| Ferrule | Brass | Gold Plated |
| Insulator | PTFE | - |

| NO. | DESCRIPTION | Q'TY | MATERIAL | FINISH | REMARKS. |
|-----------|-------------|-------------------------------------|----------|------------|---------------------|
| PARTS No. | SMA-211-001 | | NAME | SMA-SJ-316 | APPROVED |
| MATERIAL | FINISH | TOLERANCES OTHERWISE SPEC. ±0.05 | | ANGLES ±1° | CHECKED |
| SCALE | | N/S | UNIT | mm | DESIGNED S.J.LEE |
| DWG NO. | | SMA-211-001 | | DATE. | 2001.05/04 |

CUSTOMER

