


4	5	6	
No.	Revision	Date	Name
△	PN Change from 1S-504S-15029E	23/10/2013	B.G.YUN
△			

RoHS Compliant

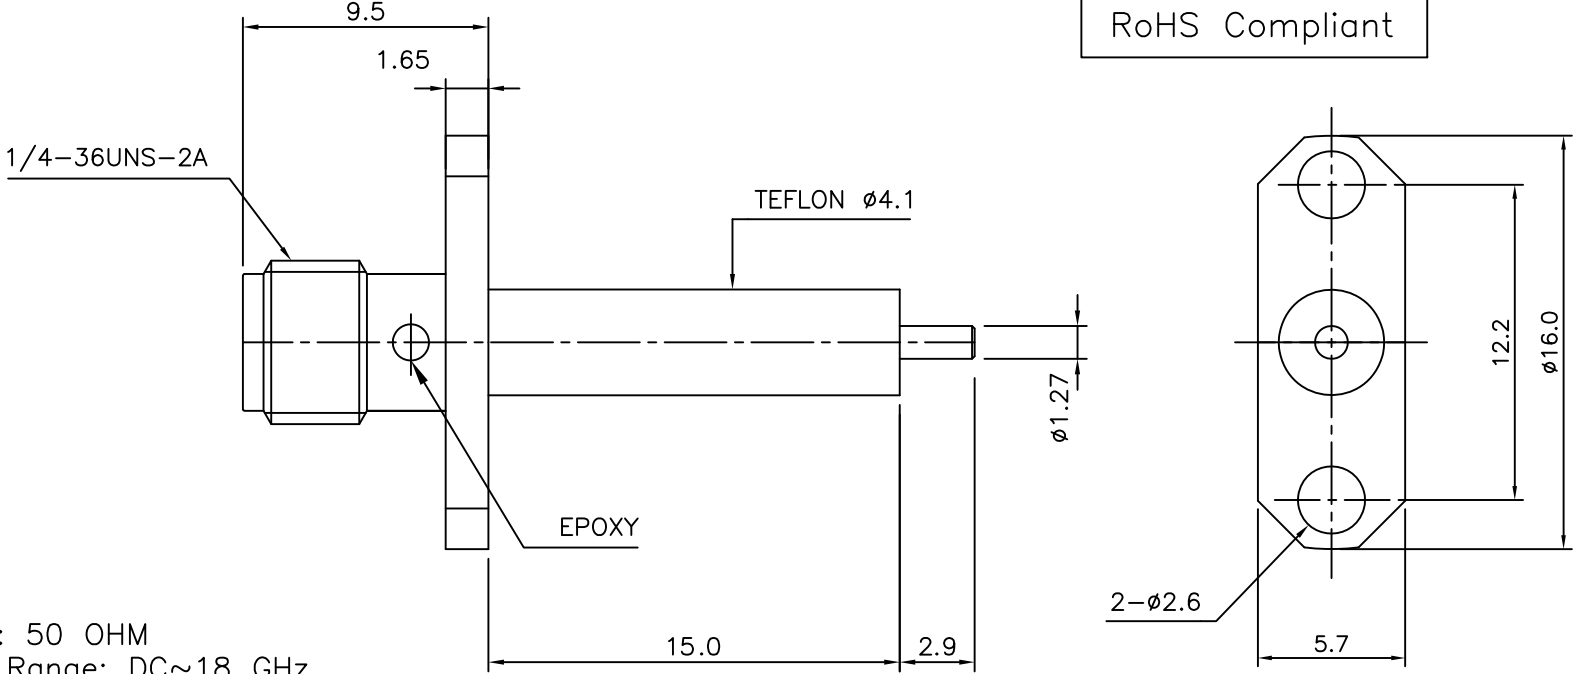

SPECIFICATIONS

- Impedance: 50 OHM
- Frequency Range: DC~18 GHz
- Voltage rating: 500 Vrms
- Dielectric Withstanding Voltage: 1500 Vrms
- Durability: 500 Cycles
- Contact retention: Axial 6.0pounds min.
Radial torque 4 inch-ounces min.
- Temperature Range: -4.0°C to +165°C

SMA-2H PANEL-FEMALE
MICRO COAXIAL END RECEPTACLE

Connector parts	Materials	Finish
Body	Stainless steel	Passivated
Center contact	Beryllium copper	Gold Plated
Insulator	PTFE	-

CUSTOMER

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	SMA-502-094		NAME	SMA-2H-JACK RECEPTACLE	APPROVED
MATERIAL	FINISH	TOLERANCES	OTHERWISE SPEC. ±0.05 ANGLES ±1°		CHECKED
		SCALE	UNIT	mm	DESIGNED S.J.LEE
		DWG NO.	SMA-502-094		DATE. 01/SEP/2009

