


1 2 3 4 5 6

No.	Revision	Date	Name
△	PN Change from 1S-522-W160	22/07/2013	B.G.YUN
△			

ELECTRICAL RATINGS

Impedance : 50 ohm
 Frequency Range : DC~18GHz
 Insulation Resistance : 5000MΩ min
 Contact Resistance : < 3mΩ
 Working Voltage : 335 VRMS max
 Dielectric Withstanding Voltage : 1000V min

RoHS Compliant

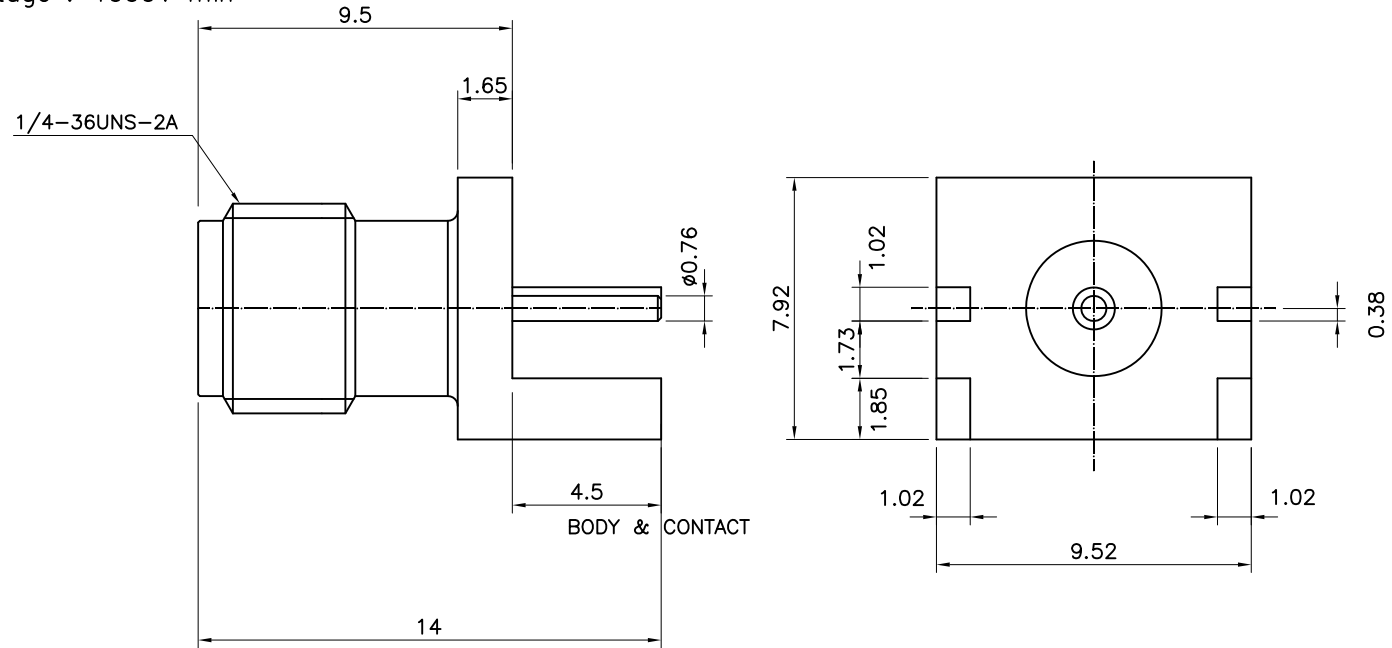

SMA PCB Edge Mount Jack Receptacle
 -Round Contact(1.60mm Board)

Connector parts	Materials	Finish
Body	Brass	Gold Plated
Center contact	Be-Cu	Gold Plated
Insulator	TEFLON	-

CUSTOMER

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	SMA-604-002	NAME	SMA-E.M JACK PCB		APPROVED
MATERIAL	FINISH	TOLERANCES OTHERWISE SPEC. ± 0.05		ANGLES $\pm 1^\circ$	CHECKED
		SCALE	UNIT mm		DESIGNED S.J.LEE
		DWG NO. SMA-604-002		DATE.	23/OCT/2006