| No. | Revision | Date | Name |
|---|---|---|---|
| 1 | PN Change from 1MA-111-00 | 11/07/2013 | B.G.YUN |
| | | | |

SPECIFICATIONS

Impedance ; 50ohm

Frequency ; DC~18GHz

Temperature range : −55°C to +155°C

2002/95/EC (RoHS) : Compliant

RoHS Compliant

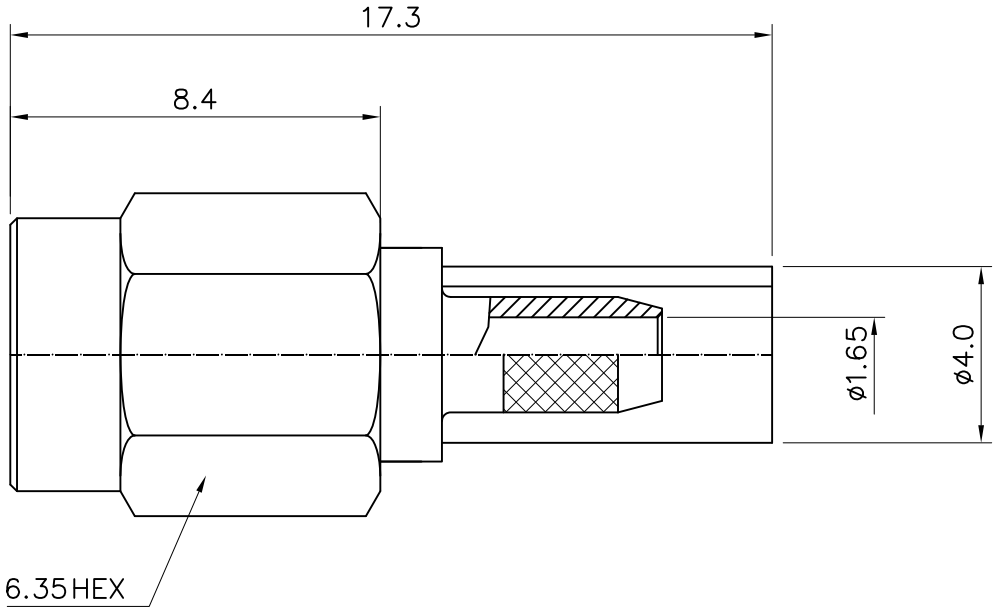


| Connector parts | Materials | Finish |
|---|---|---|
| Body | Brass | Gold Plated |
| Coupling cap | Brass | Gold Plated |
| Center contact | Brass | Gold Plated |
| Insulator | Teflon | |
| Gasket | Silicone rubber | |

SSMA-Straight PLUG
for RG316,174

| NO. | DESCRIPTION | Q'TY | MATERIAL | FINISH | REMARKS. |
|---|---|---|---|---|---|
| PARTS No. SSMA-111-001 | | NAME SSMA ST PLUG316 | | | APPROVED |
| MATERIAL | FINISH | TOLERANCES OTHERWISE SPEC. ±0.05 ANGLES ±1° | | | CHECKED |
| | | SCALE | UNIT mm | | DESIGNED S.J.LEE |
| CUSTOMER | DONGJIN TI. | DWG NO. SSMA-111-001 | | | DATE. 11/JUN/2010 |