


No.	Revision	Date	Name
△	PN Change from 1MA-111S-00	16/08/2013	B.G.YUN
△			

SPECIFICATIONS

Impedance ; 50ohm  
 Frequency ; DC~18GHz  
 Temperature range : -55°C to +155°C  
 2002/95/EC (RoHS) : Compliant

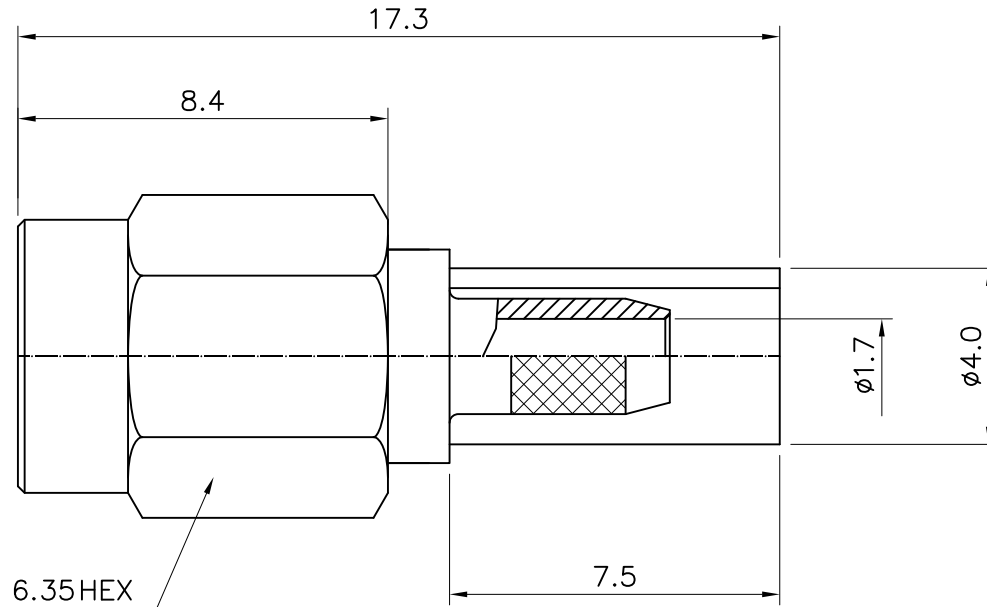

SSMA-Straight PLUG  
for RG316,174

Connector parts	Materials	Finish
Body	Stainless steel	Passivated
Coupling cap	Stainless steel	Passivated
Center contact	Brass	Gold Plated
Insulator	Teflon	-
Gasket	Silicone rubber	-
Ferrule	Brass	Nickel Plated

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	SSMA-111-006		NAME	SSMA ST PLUG316	APPROVED
MATERIAL	FINISH	TOLERANCES OTHERWISE SPEC. ±0.05		ANGLES ±1°	CHECKED
SCALE		UNIT	mm		DESIGNED S.J.LEE
DWG NO.		SSMA-111-006		DATE. 11/JUN/2010	

CUSTOMER



DONGJIN TI.