


1	2	3	4	5	6
No.	Revision			Date	Name
△					
△					

NOTES:

1. This Connector is SSMA Jack Right Angle PCB Mount
2. ELECTRIC SPEC:
 - 2.1 Impedance: 50ohm
 - 2.2 Frequency Range: DC~11 GHz
 - 2.3 Voltage rating: 250 volts peak
 - 2.4 Dielectric Withstanding Voltage: 750 VRMS
 - 2.5 VSWR: 1.25 Max
 - 2.6 Contact Resistance
 - 2.6.1 Center Contact: 2.0 Milliohms
 - 2.6.2 Outer Contact: 2.0 Milliohms
 - 2.7 Insulation Resistance: 5000 megohms
3. MECHANICAL DATA:
 - 3.1 Mating: .190-36 threaded coupling
 - 3.2 Recommended Mating torque: 5 inch-pounds
 - 3.3 Connector Durability: 500 mating and unmating cycles 12 cycles per min
4. ENVIRONMENTAL DATA:
 - 4.1 Temperature Range: -55°C to +125°C

RoHS Compliant

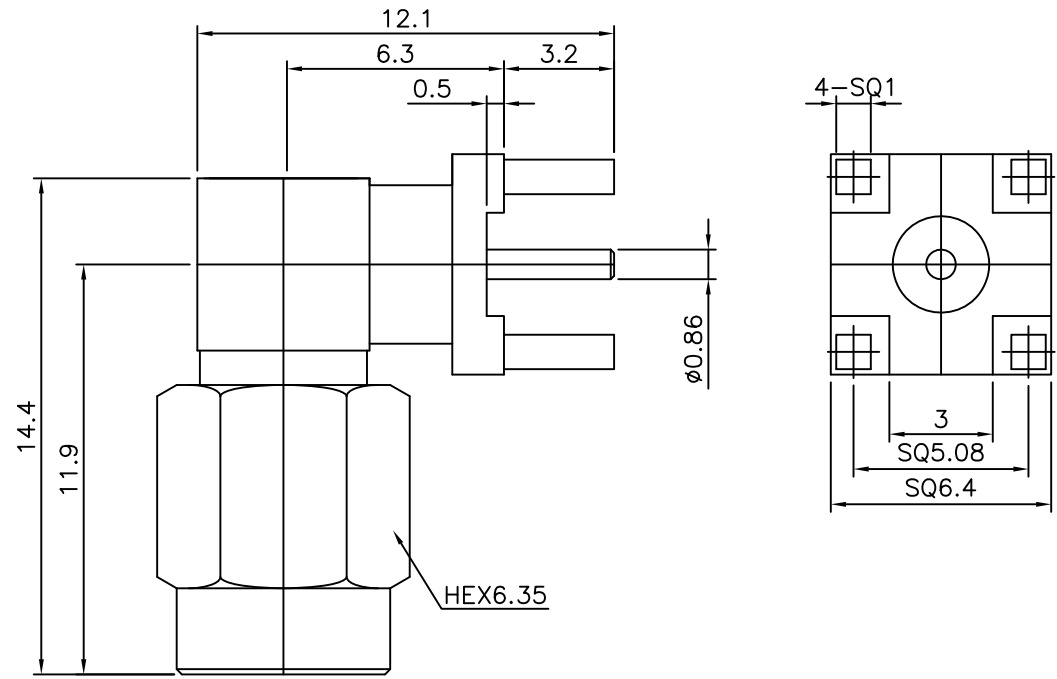

SSMA-Right Angle
PLUG PCB MOUNT

Connector parts	Materials	Finish
Coupling Cap	Brass	Gold Plated
Body	Brass	Gold Plated
Center contact	Brass	Gold Plated
Insulator	PTFE	-

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	SSMA-607-001		NAME	SSMA-LP-PCB	APPROVED S.J.LEE
MATERIAL	FINISH	TOLERANCES OTHERWISE SPEC. ±0.05		ANGLES ±1°	CHECKED
SCALE		UNIT	mm		DESIGNED S.J.PARK
DWG NO.		SSMA-607-001		DATE. 10/JAN/2014	

CUSTOMER

