No.	Revision	Date	Name
△			
△			

ELECTRICAL RATINGS

- Impedance : 50 ohm
- Frequency Range : DC~18GHz
- Insulation Resistance : 5000MΩ min
- Contact Resistance : < 3mΩ
- Working Voltage : 335 VRMS max
- Dielectric Withstanding Voltage : 1000V min
- Return loss : >20dB DC to 12.0 GHz

RoHS Compliant

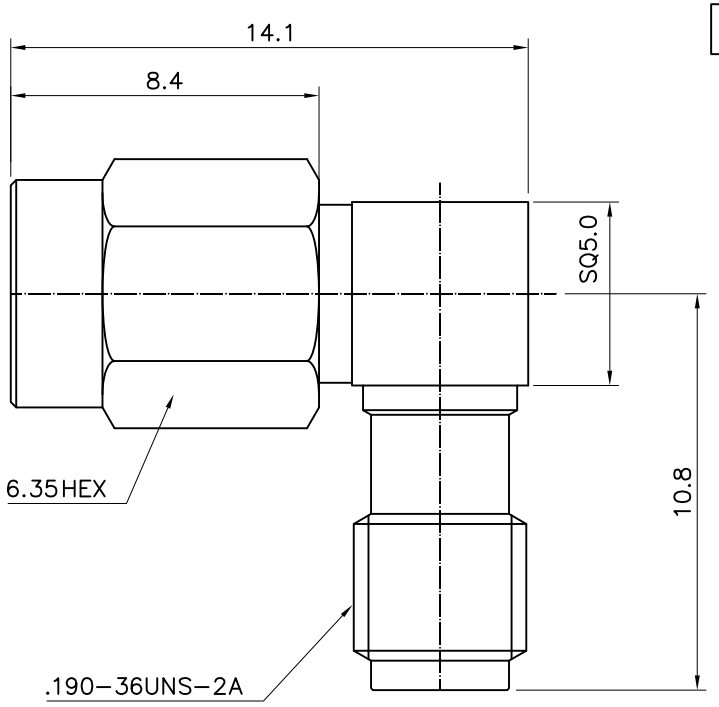

Connector parts	Materials	Finish
Body	Brass	Nickel Plated
Coupling Cap	Brass	Nickel Plated
Center contact	Beryllium copper	Gold Plated
Insulator	Teflon	
Gasket	Silicone rubber	

SSMA-Right Angle PLUG to JACK ADAPTOR

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No. SSMA-806-001		NAME SSMA-RA-PJ ADAP.			APPROVED
MATERIAL	FINISH	TOLERANCES OTHERWISE SPEC. ±0.05 ANGLES ±1°			CHECKED
		SCALE	UNIT mm		DESIGNED S.J.LEE
DONGJIN TI.		DWG NO. SSMA-806-001			DATE. 17/OCT/2013

CUSTOMER