

4	5	6	
No.	Revision	Date	Name
△	PN Change from 1T-801-00	07/08/2013	B.G.YUN
△			

RoHS Compliant

ELECTRICAL


Impedance: 50Ω
 Frequency Range: DC 11GHz
 Contact current: DC 3.5A max
 Voltage rating: 250V rms
 Contact resistance: Center contact: 2.0mΩ
 Outer contact: 0.2mΩ
 Insulation resistance: 5000MΩ min
 V.S.W.R: 1.2:1MAX
 Insertion Loss: 0.18dB max.at 9GHz

MECHANICAL

Coupling nut torque: 20Ncm-170Ncm
 Proof torque: Not applicable
 Life: 500matings
 Contact captivation: ≥27N

ENVIRONMENTAL

Temperature range: -65°C~+125°C
 Corrosion resistance: MIL-STD-202,Method101,Condition B.
 Moisture resistance: MIL-STD-202,Method106
 Thermal shock: MIL-STD-202,Method107,Condition B.
 Vibration: MIL-STD-202,Method204,Condition B.
 Shock: MIL-STD-202,Method213,Condition G.

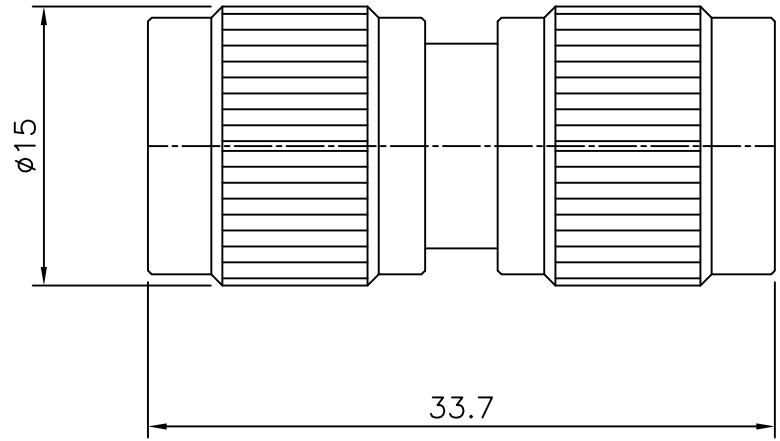

Item	Materials	Plating
Body, Coupling cap	Brass	Nickel Plated
Center contact	Brass	Gold Plated
Insulator	PTFE	-

TNC-PLUG TO PLUG-Adaptor

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	TNC-801-001	NAME	TNC/PP-Adaptor		APPROVED
MATERIAL	FINISH	TOLERANCES OTHERWISE SPEC. ±0.05		ANGLES ±1°	CHECKED
SCALE		UNIT	mm		DESIGNED S.J.LEE
DWG NO.		TNC-801-001		DATE.	2001.5/04

CUSTOMER

